


2-Way Hose Switch

Heavy-duty, pneumatically actuated routing solution with a flexible hose design. Built for demanding bulk material handling, it delivers exceptional durability and a virtually leak-proof seal to optimize your process flow.

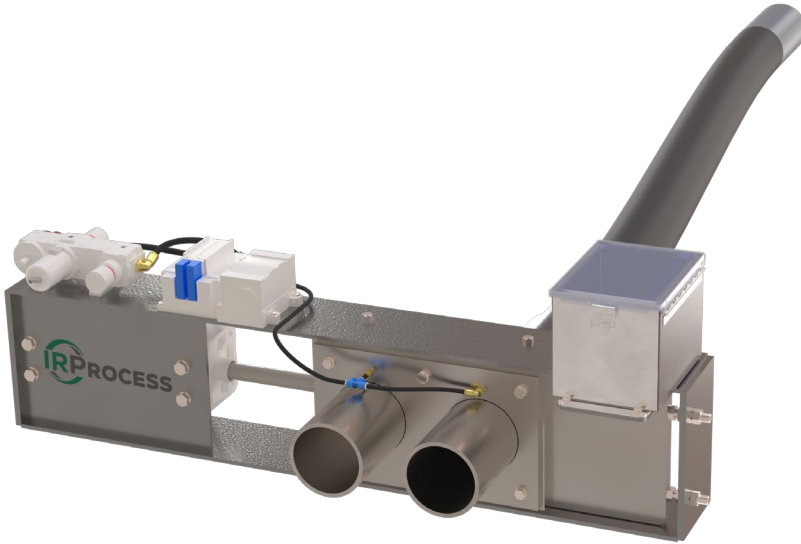

Features & Benefits


- Stainless Steel Sliding Components
- Delivered fully assembled and factory-tested
- Abrasion Resistant Material Handling Hose
- Utilizes Mechanical Hard Stops & Reed Switches to ensure precise alignment
- Cushioned pneumatic cylinders designed to reduce mechanical impact for extended longevity
- Pre-wired enclosure for straightforward PLC integration and position feedback.


Specifications

- Controls: 24 VDC / 120 VAC
- Compressed air: Clean & dry at 80 PSIG min
- Design Pressure: 100 PSIG, works with both dense and dilute phase systems

Options

- Ceramic Lined Material Handling Hose for Abrasive Materials.
- Customized Convey Line Spacing
- High Temperature Design
- Explosion Proof Design (Class I/II, Div I/II)

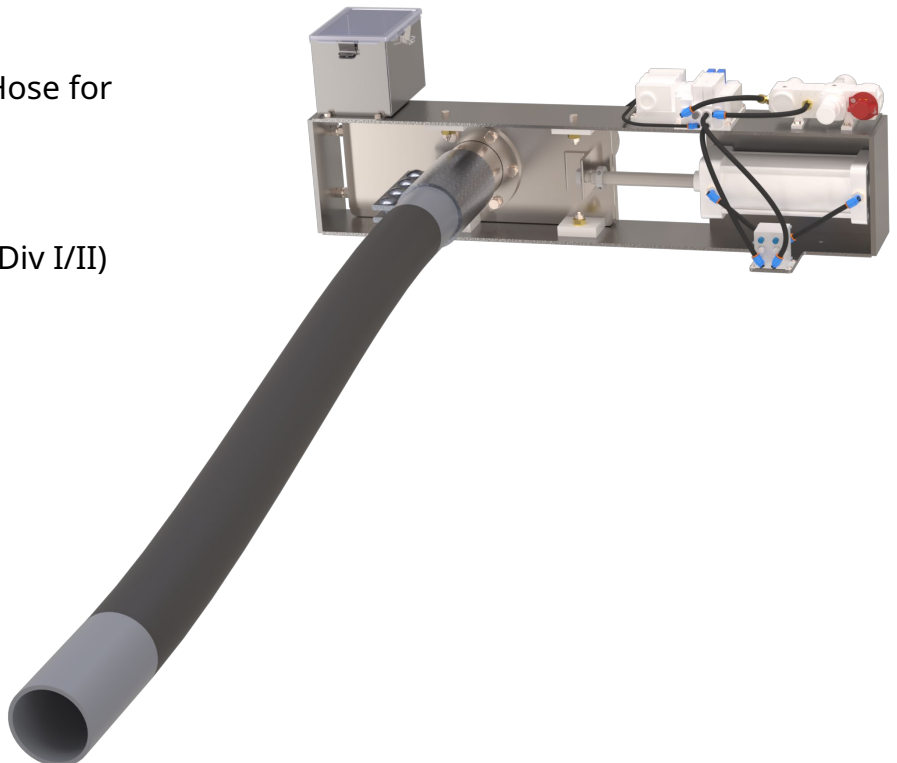

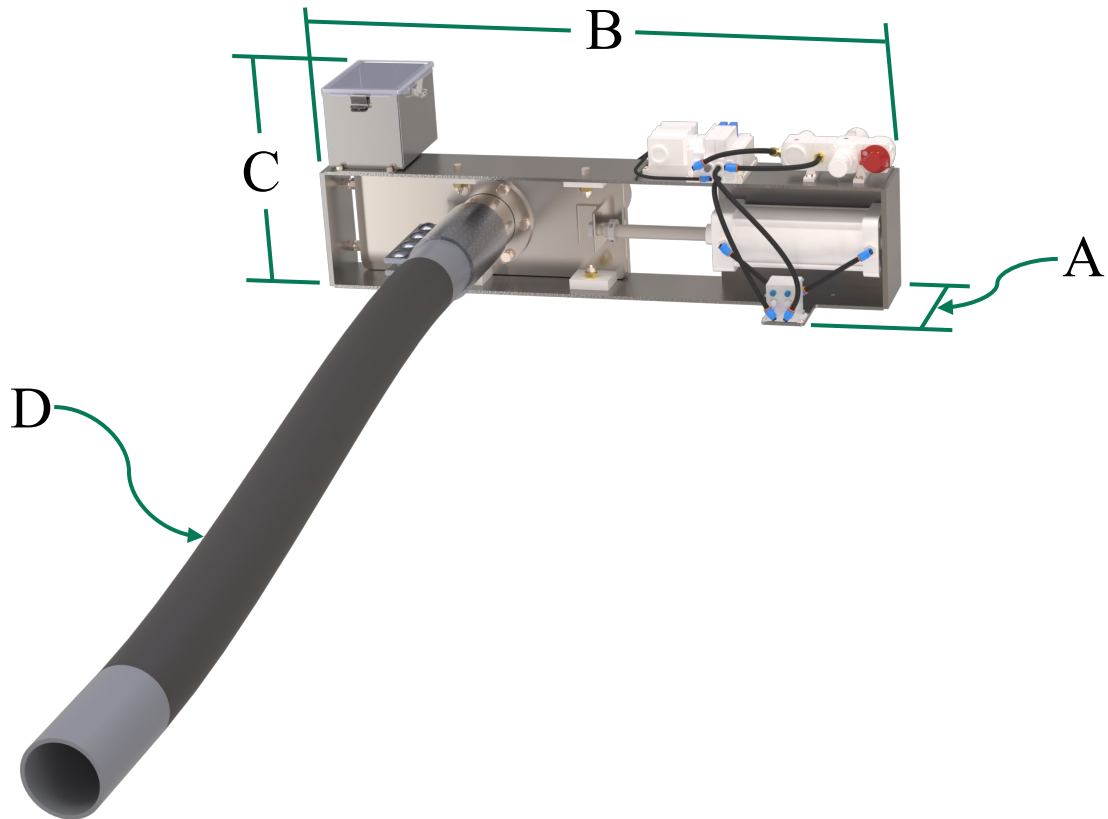

2-Way Hose Switch Dimensions				
Sizes	A Depth	B Width	C Height	D Hose Size
2"	1'-4"	3'	1'-2"	2" X 40" LG
3"		3'-4"	1'-3"	3" X 60" LG
4"		3'-8"	1'-4"	4" X 80" LG
5"		4'-5"	1'-5"	5" X 100" LG
6"		4'-9"	1'-6"	6" X 120" LG
8"		5'-6"	1'-8"	8" X 160" LG
10"		6'-10"	1'-10"	10" X 200" LG
12"		7'-7"	2'	12" X 240" LG